

Technical Data Sheet

1206 Package Chip LED with Inner lens

11-21UBC/C430/TR8

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.

Descriptions

- The 11-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

D. AM	Chip	E.W. LO.L.	Resin Color	
Part No.	Material	Emitted Color		
11-21UBC/C430/TR8	InGaN/SiC	Blue	Water Clear	




Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 9


Device No: DSE-111-016 Prepared date: 6-Apr-2009 Prepared by: Huang yongxin




11-21UBC/C430/TR8


Package Outline Dimensions








For reflow soldering (propose)





Notes: The tolerances unless mentioned are ± 0.1 , unit=mm.



11-21UBC/C430/TR8

Absolute Maximum Ratings (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	IFP	70	mA
Power Dissipation	Pd	130	mW
Electrostatic Discharge	ESD	1000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\! \mathbb{C}$
Soldering Temperature	Tsol	C	: 260 °C for 10 sec. : 350 °C for 3 sec.

Electro-Optical Characteristics (Ta=25°C)

		· ` · · · · · · · · · · · · · · · · · ·				
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	26	33		mcd	
Viewing Angle	2 \theta 1/2		60		deg	
Peak Wavelength	λр		428		nm	
Dominant Wavelength	λd		466		nm	IF =20mA
Spectrum Radiation Bandwidth	Δλ		65		nm	
Forward Voltage	VF		3.8	4.5	V	
Reverse Current	Ir			50	μ A	$V_R = 5V$


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 9


Device No: DSE-111-016 Prepared date: 6-Apr-2009 Prepared by: Huang yongxin




11-21UBC/C430/TR8

Typical Electro-Optical Characteristics Curves











Forward Current Denating Curve



Forward Current vs. Forward Voltage 50 Forward Current I, (mA) 40 30 50 10 2.6 3.0 3.4 3.8 4.2


Forward Voltage $V_F(V)$

Luminous Intensity vs. Forward Current Ta=25°C



Forward Current Ip (mA)

Radiation Diagram






11-21UBC/C430/TR8

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

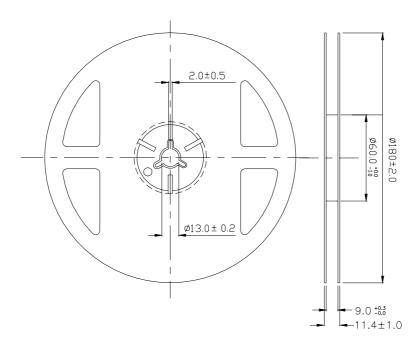

Note: The tolerances unless mentioned are ± 0.1 , Unit = mm.

Everlight Electronics Co., Ltd.

Device No: DSE-111-016

http://www.everlight.com

Prepared date: 6-Apr-2009

Rev. 2


Page: 5 of 9

Prepared by: Huang yongxin




11-21UBC/C430/TR8

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

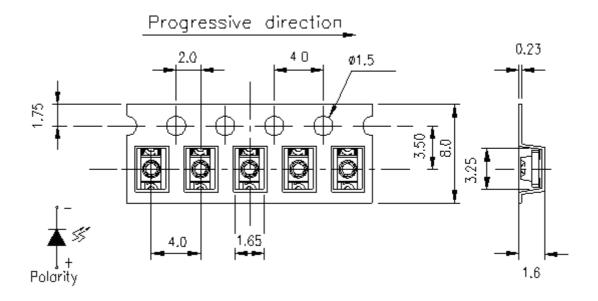

Note: The tolerances unless mentioned are ± 0.1 , Unit = mm.

Moisture Resistant Packaging

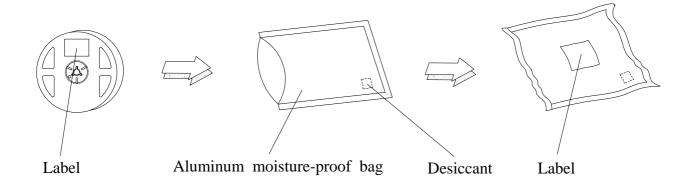

Everlight Electronics Co., Ltd.

Device No: DSE-111-016

http://www.everlight.com

Prepared date: 6-Apr-2009

Rev. 2

Page: 6 of 9

Prepared by: Huang yongxin



11-21UBC/C430/TR8

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd.

Device No: DSE-111-016

http://www.everlight.com

Prepared date: 6-Apr-2009

Rev. 2 Page: 7 of 9

Prepared by: Huang yongxin




11-21UBC/C430/TR8

Precautions For Use

- Over-current-proof
 Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).
- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

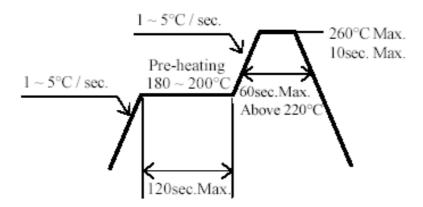

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 9

Device No: DSE-111-016 Prepared date: 6-Apr-2009 Prepared by: Huang yongxin




11-21UBC/C430/TR8

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

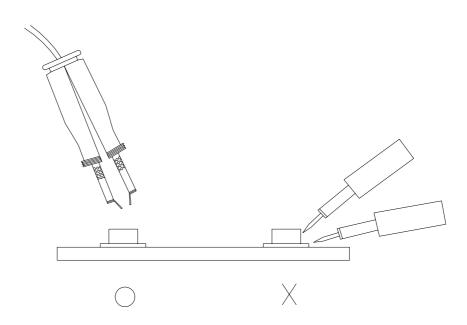

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 9

Device No: DSE-111-016 Prepared date: 6-Apr-2009 Prepared by: Huang yongxin